


5cm Ultra Low Viscosity Deep Casting Epoxy Resin River Table Long Working Time

Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com


Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: DP-3001
- Minimum Order Quantity: 500KG
- Packaging Details: 100g/250g/300g/500g/750g/1000g, 2kg/3kg/5kg/10kg/15kg/20kg/200kg per bottle
- Delivery Time: 5-8 working days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 300, 000 kg per day

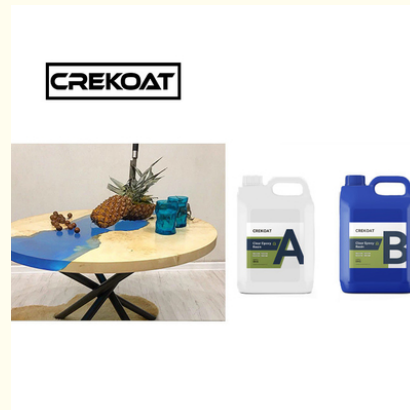


Product Specification

- Features: Non Shrink
- Name: Deep Pour Epoxy Resin
- Materials: River Table Epoxy Resin
- Mixing Ratio: 3:1 By Weight
- Pot Life: 60 Minutes
- Shelf Life: 12 Months
- Thickness: 5cm~10cm
- Application: Brush, Roller, Stick
- Highlight: Deep Casting Epoxy Resin River Table, Deep Casting Epoxy Resin, Ultra Low Viscosity Epoxy Resin

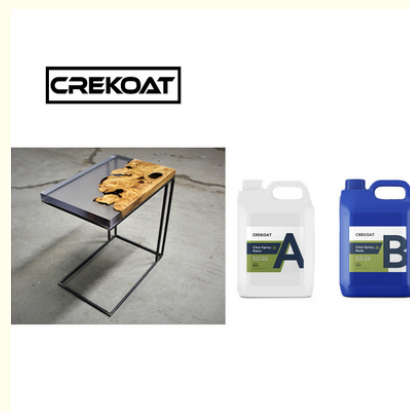

More Images



Product Description

Ultra Low Viscosity Long Working Time Deep Casting Epoxy Resin For Table

Product Descriptions:

Product Name	Epoxy Resin For Table
Drying time (25°C)	Touch dry≤8 hours / Hard dry≤48 hours
Viscosity (25°C), cps	Part A 3000-3500, Part B 300
Solid Content, %	100
Hardness, shore D	≥90
Coverage (15kgs Kit)	1"Thick(2.54cm) 6.0 sq.ft

Quick Details:

Powdered colorants, dyes, and alcohol inks can be mixed into the epoxy for amazing special effects adding vibrancy to any river table, encapsulated object, voids, turning projects, custom wood tables or art projects. It's engineered to work well with wood, glass, ceramic, stone aggregate, cement, electronic parts and most metals in thicknesses up to 2" without cracking or splitting. If thicknesses exceeding 2" are desired, multiple pours can give you the seamless depth you're looking for.

Features:

1. No VOC's and Low Odor
2. Low Viscosity
3. U.V. Resistant & Non-Yellowing
4. Self Leveling Formula
5. High Gloss Durable Finish
6. Heat and Impact Resistance

Advantages:

The Deep Pour Epoxy lends itself perfectly to river tables and projects that require a depth of pour up to 50mm in one go. Adding pigments can create stunning creative looks and elevate your project to a stunning work of art. Optically clear with good UV resistance and very low exotherm. Pour up to 50mm in depth in one pour. Use multiple pours to build up higher depth. Due to the low exotherm you are able to pour up to 50mm with confidence. This low viscosity epoxy resin mixture leaves no hole, crack or opening unattended. The slow curing epoxy emits little to no heat and hardens to a durable and solid finish.



Guangdong Crekoat New Materials Co., Ltd.



+8615017402317



info@crekoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China