


Powder Yellow Line Thermoplastic Line Marking Paint Flexibility 3mm

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: ARP-001
- Minimum Order Quantity: 500KG
- Packaging Details: One Pack: 25 kg in a plastic bag, Custom packaging is available.
- Delivery Time: 5-8 working days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 300, 000 kg per day

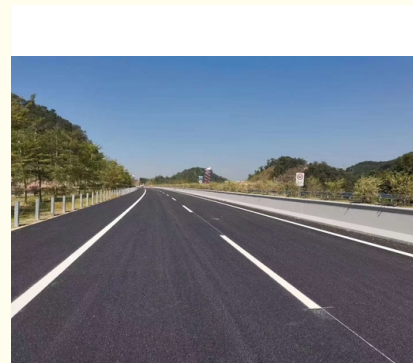

Product Specification

- Features: Yellow And White
- Name: Road Marking Paint
- Materials: Hot Applied Thermoplastic
- State: Powder
- Mixing Ratio: One Component
- Shelf Life: 12 Months
- Thickness: 1mm~3mm
- Application: Hot Melt
- Highlight: Powder Thermoplastic Line Marking Paint , Thermoplastic Line Marking Paint Flexibility , Yellow Line Marking Paint 3mm

Product Description

Eco Friendly Thermoplastic Line Marking Paint Good Leveling

Product Descriptions:

Product Name	Thermoplastic For Roads
Drying time (25°C)	Touch dry≤0.2 hours / Hard dry≤6 hours
Adhesion strength, S	≥60
Flexibility, mm	≤0.03
Moh's hardness	≥8
Coverage (advise 2 coats)	0.15kg/sqm per coat

Quick Details:

Thermoplastic paint is a road marking material based on thermoplastic petroleum resin, with high-quality pigments and additives as auxiliary materials. The marking line used as the raw material has the advantages of quick-drying, easy construction, good light reflection, and long service life. Composed of petroleum resin, EVA, PE wax, color filler, and other materials. It is in powder form at a normal temperature. It is heated to 180-200°C with hot kettle. It has the characteristics of a linear shape, good abrasion resistance, etc., and the reflective microbeads are scattered on the construction surface, which has a good reflective effect at night. It is widely used in highways and urban roads.

Features:

1. Good adhesion
2. High durability
3. Quick drying
4. Low VOC
5. Fast Application
6. Resistant to color fading

Advantages:

Superior environmental impact - as measured by life-cycle analysis, compared to other pavement marking technologies. Enhanced retention of glass beads and greater flexibility - for extended retroreflectivity and improved night-time visibility. Fast-drying properties - with fast-dry-to-no-pickup and resistance to early rain showers under a wide range of climatic conditions. Improved wear properties - over various bituminous and concrete road surfaces. Low-VOC formulations - that exceed most road-marking paint regulation.



Guangdong Crekoat New Materials Co., Ltd.



+8615017402317



info@crekoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China