

MSDS Fast Drying Epoxy Floor Paint Decorative Epoxy Flake Flooring Urethane Topcoat

Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com


Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-FL2001
- Minimum Order Quantity: 300KG
- Price: US\$4.5-6.5/Kg
- Packaging Details: Bottle/Carton/Wooden Box
- Delivery Time: 3-7 Working days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 1000000 Ton/Year





Product Specification

- Formal Designation: Vinyl Flake Epoxy Flooring
- Particular: Strong Adhesion
- Materials: Epoxy Resin And Hardener
- Key Words: Interior Or Exterior Use
- Application: Wood, Brick, Ceramic, Concrete
- Mixing Ratio: 2:1 By Weight
- Pot Life: 30 Minutes
- Shelf Life: 12 Months
- Highlight: **Fast Drying Epoxy Floor Paint, MSDS Decorative Epoxy Floor Paint**

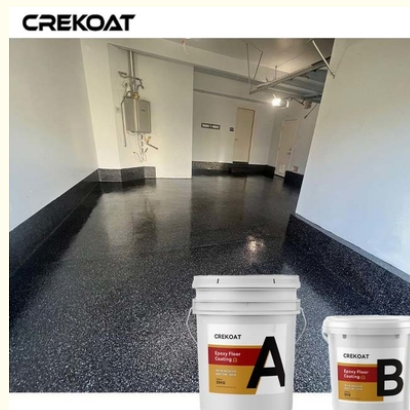

More Images



Product Description

Fast Drying Epoxy Floor Paint Decorative Epoxy Flake Flooring Urethane Topcoat

Quick Details Of Fast Drying Epoxy Floor Paint:

The advantage of epoxy flake flooring is not just its aesthetics. Epoxy flake flooring has excellent durability, as well as extremely high wear resistance and slip resistance. The ultimate result is that seamless flooring has no corners or gaps and can collect dirt and moisture over time, making it a hygienic choice for living spaces. This is not all yet. Epoxy flake flooring can be installed in the shortest possible time, which is economical and has the lowest maintenance cost. That's why it's becoming increasingly popular among contractors and consumers. Epoxy flake flooring consists of an epoxy resin primer, a layer of decorative flakes or debris, and an epoxy resin or urethane topcoat. You can add multiple topcoats to increase strength.

Features Of Fast Drying Epoxy Floor Paint:

1. Self leveling and slip resistance
2. Unlimited color choices
3. Odorless, non-flammable
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Tough, high gloss, water resistant

Advantages Of Fast Drying Epoxy Floor Paint:

Epoxy Flake Coating is a highly-durable floor coating application that incorporates a double broadcast of colored flakes chips with epoxy resin and polyaspartic coatings. The system provides flooring solutions for the most demanding heavy-traffic environments, specifically in areas that require significant traction. The durable and stunning appearance that comes from this epoxy finish will endure for many years to come, with minimal or no maintenance other than regular cleaning using mild cleaning products. UV stable epoxy flake coating offers seamless, safe, highly durable, and easy to clean solutions to meet the most demanding flooring challenges.

Product Descriptions Of Fast Drying Epoxy Floor Paint:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	600-800 mPa.s	50-150
Density, g/cm ³	1.07±0.05	0.95±0.03
Mix Ratio	2:1 by weight	
Hardness	Shore, D82-85	
Pot Life	30-40mins@25°C	
Curing Time	16-24hrs@25°C, 12-15hrs@35°C 24hrs, Dry Completely	
Thickness	1-3 mm	
Recoat Time	2Hrs	
Shelf Life	12 Months	
Application	Industrial Use - Garages; Warehouses; Airports and hangars; Commercial Use - Shopping malls and boutiques; Hotels; Offices; Showrooms; Restaurants; Hospitals; Schools; Bar Tops, Table Tops. Residential Use – Entrances and hallways; basements; entertainment rooms; bathrooms; kitchens and living rooms;	



Guangdong Crekoat New Materials Co., Ltd.



+8615017402317



info@crekoat.com



epoxyresinfloorcoating.com

