


Garages Epoxy Flake Floor Coating Composed Of Epoxy Resin Colored

Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-FL2001
- Minimum Order Quantity: 400KG
- Price: US\$4.5-6.5/Kg
- Packaging Details: Bottle/Cartron/Wooden Box
- Delivery Time: 3-7 Working days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 1000000 Ton/Year

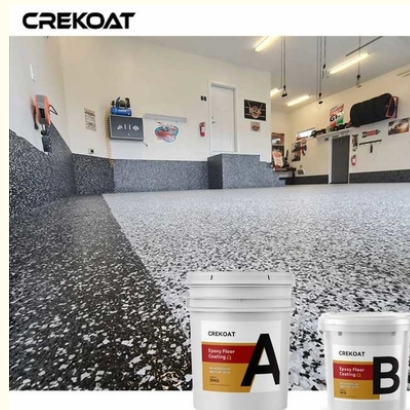

Product Specification

- Article Tag: Flakes For Garage Floor Painting
- Prominent Aspect: Durable Resilience
- Key Words: Interior And Exterior Use
- Materials: Epoxy Resin And Hardener
- Application: Wood, Ceramic Tile, Concrete
- Mixing Ratio: 2:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **Colored Epoxy Flake Floor Coating, Resin Epoxy Flake Floor Coating**



Product Description

Garages Epoxy Flake Floor Coating Composed Of Epoxy Resin And Colored Flakes

Quick Details Of Epoxy Flake Floor Coating:

Epoxy flake coating is a type of decorative flooring system composed of epoxy resin and colored flakes. It offers several distinctive features, including high durability, chemical resistance, and a visually appealing finish. The coating is commonly used in various settings, such as residential garages, commercial spaces, and industrial facilities. Its composition allows for a seamless and easy-to-clean surface that is resistant to stains, abrasions, and impacts. Epoxy flake coating is often chosen for its ability to enhance the aesthetics of a space while providing a robust and long-lasting flooring solution.

Features Of Epoxy Flake Floor Coating:

1. Provides long-lasting protection
2. Applied to concrete, wood, and metal
3. Odorless, low VOC, non-flammable
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Epoxy Flake Floor Coating:

Epoxy Flake Coating is a highly-durable floor coating application that incorporates a double broadcast of colored flakes chips with epoxy resin and polyaspartic coatings. The system provides flooring solutions for the most demanding heavy-traffic environments, specifically in areas that require significant traction. The durable and stunning appearance that comes from this epoxy finish will endure for many years to come, with minimal or no maintenance other than regular cleaning using mild cleaning products. UV stable epoxy flake coating offers seamless, safe, highly durable, and easy to clean solutions to meet the most demanding flooring challenges.

Product Descriptions Of Epoxy Flake Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	600-800 mPa.s	50-150 mPa.s
Density, g/cm3	1.07±0.05	0.95±0.03
Mix Ratio	2:1 by weight	
Hardness	Shore, D82-85	
Pot Life	30-40mins@25°C	
Curing Time	8-12hrs@35°C, 16-24hrs@25°C 24hrs, Dry Completely	
Thickness	1-3 mm	
Recoat Time	2Hrs	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crecoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China