

Quick Drying Water Based Epoxy Floor Coating Rapid Recoat Time High Gloss

Our Product Introduction

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-WB3001
- Minimum Order Quantity: 400KG
- Price: US\$3.5-5.5/Kg
- Packaging Details: Bottle/Carton/Wooden Box
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 1000000 Ton/Year


CREKOAT



Product Specification

- Item Moniker: Water Based Epoxy Concrete Sealer
- Key Distinguishing Factor: Extreme Scratch Resistance
- Key Words: Seamless, High Gloss Finish
- Materials: Epoxy Resin And Hardener
- Application: Wood, Ceramic Tile, Concrete
- Mixing Ratio: 3:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: Quick Drying Water Based Epoxy Floor Coating, Rapid Recoat Water Based Epoxy Floor Coating

CREKOAT

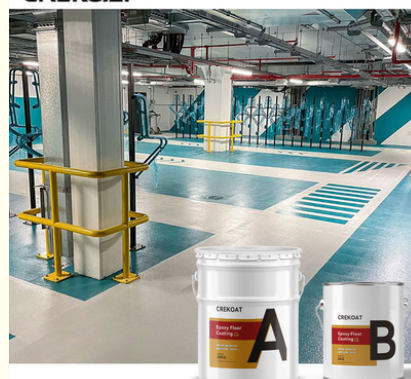

for more products please visit us on epoxyresinfloorcoating.com

Product Description

Quick-Drying Water Based Epoxy Floor Coating Rapid Recoat Time High-Gloss

Quick Details Of Water Based Epoxy Floor Coating:

Water Based Epoxy Floor Coating stands out with its rapid recoat time, minimizing project timelines and maximizing efficiency. With its quick-drying formula, multiple coats can be applied in a shorter span, reducing downtime and allowing for faster project completion. This feature is especially advantageous in fast-paced environments such as retail stores or healthcare facilities where time is of the essence. Additionally, the coating's fast curing time means that the floor can be subjected to light traffic sooner, minimizing disruptions to daily operations.

Features Of Water Based Epoxy Floor Coating:

1. High-gloss and aesthetically pleasing finish
2. Can be applied in various thicknesses
3. Excellent resistance to water and moisture
4. Offers excellent adhesion to various surfaces
5. Withstand heavy equipment and machinery
6. Suitable for industries and commercial spaces

Advantages Of Water Based Epoxy Floor Coating:

Epoxy floor coating is a flooring system composed of epoxy resin and hardener that creates a strong, durable, and long-lasting surface. This coating system is highly resistant to abrasion, chemicals, and moisture, making it ideal for high-traffic areas in commercial, industrial, and residential settings. Epoxy floor coating can be customized with a variety of colors, patterns, and textures, providing a unique and decorative finish. It is easy to clean and maintain, reducing the need for harsh chemicals and providing a low-maintenance flooring solution. Epoxy floor coating is also slip-resistant, improving safety in workplaces and homes. This flooring system can be applied to a variety of substrates, including concrete, wood, and metal, providing versatility and adaptability to any space.

Product Descriptions Of Water Based Epoxy Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Customized Colors	Transparent
Density@25°C	1.3g/cm3	
Mix Ratio	3:1 by weight	
Hardness	3H	
Pot Life	30-40mins@25°C	
Curing Time	12-15hrs@35°C, 16-24hrs@25°C 24hrs, Dry Completely	
Thickness	1-3mm	
Recoat Time	2Hrs	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	



 +8615017402317  info@crekoat.com  epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China