

Substrate Versatility Harga Epoxy Flake Coating Time Tested Durability

Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com


Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-FL2001
- Minimum Order Quantity: 400KG
- Price: US\$4.0-6.0/Kg
- Packaging Details: Bottle/Cartron/Wooden Box
- Delivery Time: 3-7 Working days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 1000000 Ton/Year



Product Specification

- Trade Item Monogram: Epoxy Garage Floor Paint Flakes
- Peculiar Mark: Monolithic Application
- Key Words: Interior And Exterior Use
- Materials: Epoxy With Flakes
- Application: Wood, Ceramic Tile, Concrete
- Mixing Ratio: 2:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **Harga Epoxy Flake Coating,
Substrate Versatility Epoxy Flake Coating**

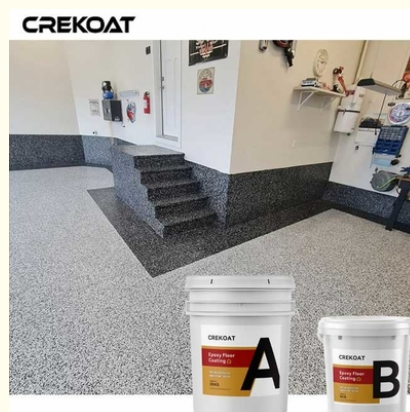

Product Description

Substrate Versatility Harga Epoxy Flake Coating Time-Tested Durability

Quick Details Of Epoxy Flake Floor Coating:

Epoxy Flake Floor Coating: Where Craftsmanship Meets Durability. By merging epoxy resin with decorative flakes, it constructs a floor that's not just built to last, but to inspire. Its endurance is a given, but its artistic dimension sets it apart. An array of colors and flake patterns invites you to curate a floor that tells a story. From homes to high-traffic areas, this coating transcends utility. It's not merely a surface; it's a canvas of possibilities. The interplay of robustness and aesthetics creates a floor that resonates with strength and elegance, turning every footstep into a statement of resilience and style.

Features Of Epoxy Flake Floor Coating:

1. Adapts to various base materials
2. Proven long-term performance
3. Strong adhesion for lasting protection
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Epoxy Flake Floor Coating:

Epoxy Flake Coating is a highly-durable floor coating application that incorporates a double broadcast of colored flakes chips with epoxy resin and polyaspartic coatings. The system provides flooring solutions for the most demanding heavy-traffic environments, specifically in areas that require significant traction. The durable and stunning appearance that comes from this epoxy finish will endure for many years to come, with minimal or no maintenance other than regular cleaning using mild cleaning products. UV stable epoxy flake coating offers seamless, safe, highly durable, and easy to clean solutions to meet the most demanding flooring challenges.

Product Descriptions Of Epoxy Flake Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	600-800 mPa·s	50-150 mPa·s
Density, g/cm ³	1.07±0.05	0.95±0.03
Mix Ratio	2:1 by weight	
Hardness	Shore, D82-85	
Pot Life	30-40mins@25°C	
Curing Time	8-12hrs@35°C, 16-24hrs@25°C 24hrs, Dry Completely	
Thickness	1-3 mm	
Recoat Time	2Hrs	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crecoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China