




High Tensile Strength Epoxy Flake Coating With Chemical Bonded Flakes

Our Product Introduction

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-FL2001
- Minimum Order Quantity: 300KG
- Price: US\$4.0-6.0/Kg
- Packaging Details: Bottle/Cartron/Wooden Box
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 1000000 Ton/Year

CREKOAT

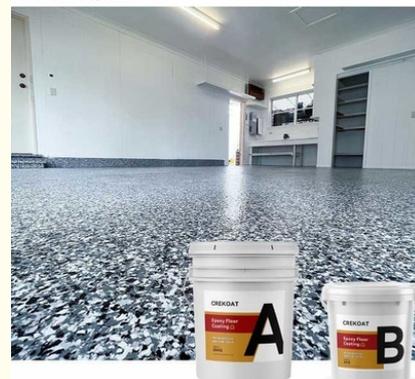

Product Specification

- Commodity Title: Epoxy Colour Flakes
- Notable Inclusion: Fast Curing
- Key Words: Interior And Exterior Use
- Materials: Epoxy With Flakes
- Application: Wood, Ceramic Tile, Concrete
- Mixing Ratio: 2:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **High Tensile Strength Epoxy Flake Coating, Chemical Bonded Epoxy Flake Coating**

CREKOAT



for more products please visit us on epoxyresinfloorcoating.com

Product Description

High Tensile Strength Epoxy Flake Coating With Chemical Bonded Flakes

Quick Details Of Epoxy Flake Floor Coating:

Epoxy flake floor coating excels in durability, holding up against heavy use and offering a cost-effective long-term solution. It exhibits outstanding chemical resistance, making it ideal for spaces prone to spills. Its ability to be customized with a variety of colors and flake patterns ensures that it is as aesthetically pleasing as it is practical. Maintenance is simple, thanks to its seamless surface that resists dirt and stains, reducing the time and effort needed for cleaning. The coating's versatility allows it to be employed in various environments, from residential garages to commercial and industrial spaces. Its slip-resistant properties enhance safety, and its seamless finish prevents moisture penetration, making it an all-around advantageous flooring choice.

Features Of Epoxy Flake Floor Coating:

1. Resists stretching and tearing
2. Ensures durable flake adhesion
3. Strong adhesion for lasting protection
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Epoxy Flake Floor Coating:

Epoxy Flake Coating is a highly-durable floor coating application that incorporates a double broadcast of colored flakes chips with epoxy resin and polyaspartic coatings. The system provides flooring solutions for the most demanding heavy-traffic environments, specifically in areas that require significant traction. The durable and stunning appearance that comes from this epoxy finish will endure for many years to come, with minimal or no maintenance other than regular cleaning using mild cleaning products. UV stable epoxy flake coating offers seamless, safe, highly durable, and easy to clean solutions to meet the most demanding flooring challenges.

Product Descriptions Of Epoxy Flake Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	600-800 mPa·s	50-150 mPa·s
Density, g/cm ³	1.07±0.05	0.95±0.03
Mix Ratio	2:1 by weight	
Hardness	Shore, D82-85	
Pot Life	30-40mins@25°C	
Curing Time	8-12hrs@35°C, 16-24hrs@25°C 24hrs, Dry Completely	
Recoat Time	2Hrs	
Thickness	1-5mm	
Shelf Life	12Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	



 +8615017402317  info@crekoat.com  epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China