

Nanotechnology Formulations Epoxy Flake Floor Coating High Pressure Resistance


Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-FL2001
- Minimum Order Quantity: 300KG
- Price: US\$4.0-6.0/Kg
- Packaging Details: Bottle/Cartron/Wooden Box
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 1000000 Ton/Year

CREKOAT

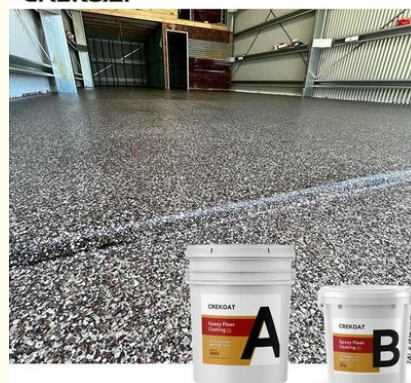

Product Specification

- Merchandise Signature: Gold Flake Epoxy Floor
- Predominant Element: Thermal Insulator
- Key Words: Self-Leveling, Fast Curing
- Materials: Epoxy With Flakes
- Application: Wood, Ceramic Tile, Concrete
- Mixing Ratio: 2:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **Nanotechnology Formulations Epoxy Flake Floor Coating**
, Epoxy Flake Floor Coating Self Leveling,
Fast Curing Epoxy Flake Floor Coating

CREKOAT



Product Description

Nanotechnology Formulations Epoxy Flake Floor Coating High-Pressure Resistance

Quick Details Of Epoxy Flake Floor Coating:

Epoxy flake floor coating reimagines flooring as an art form, blending durability and aesthetics. Its robustness is unmatched, enduring high traffic and chemical exposure with ease. What sets it apart is its creative versatility. A vast palette of colors and flake patterns allows for unique, personalized designs, turning any space into a work of art. Be it in residential garages, homes, or commercial settings, it marries function and visual appeal. Maintenance is effortless with its easy-to-clean, seamless surface. Slip-resistant features ensure safety, and the impermeable finish wards off moisture. Epoxy flake floor coating is more than a covering; it's a celebration of both strength and artistic expression, marking a new era where every step taken resonates with resilience and style.

Features Of Epoxy Flake Floor Coating:

1. Ideal for areas with heavy machinery
2. Utilizes advanced nanotech for performance
3. Strong adhesion for lasting protection
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Epoxy Flake Floor Coating:

Epoxy Flake Coating is a highly-durable floor coating application that incorporates a double broadcast of colored flakes chips with epoxy resin and polyaspartic coatings. The system provides flooring solutions for the most demanding heavy-traffic environments, specifically in areas that require significant traction. The durable and stunning appearance that comes from this epoxy finish will endure for many years to come, with minimal or no maintenance other than regular cleaning using mild cleaning products. UV stable epoxy flake coating offers seamless, safe, highly durable, and easy to clean solutions to meet the most demanding flooring challenges.

Product Descriptions Of Epoxy Flake Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	600-800 mPa.s	50-150 mPa.s
Density, g/cm3	1.07±0.05	0.95±0.03
Mix Ratio	2:1 by weight	
Hardness	Shore, D82-85	
Pot Life	30-40mins@25°C	
Curing Time	8-12hrs@35°C, 16-24hrs@25°C 24hrs, Dry Completely	
Recoat Time	2Hrs	
Thickness	1-5mm	
Shelf Life	12Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crecoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China