

Less Slippery Polyaspartic Floor Coating And More Resistant To Scratching

Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com


Basic Information

- Place of Origin: DONGGUAN, CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-PLS1001
- Minimum Order Quantity: 500KG
- Price: US\$8.5-12.5/Kg
- Packaging Details: Bottle/Cartron/Wooden Box
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 1000000 Ton/Year



Product Specification

- Signature Mark: Garage Floor Poly
- Outstanding Feature: Anti Scratch
- Key Words: Interior And Exterior Use
- Materials: 90% Solid Polyaspartic
- Application: Wood, Ceramic Tile, Concrete
- Mixing Ratio: 1:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **Less Slippery Polyaspartic Floor Coating, Scratch Resistant Polyaspartic Floor Coating**

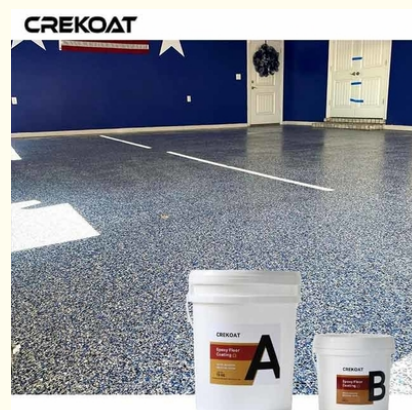

Product Description

Less Slippery Polyaspartic Floor Coating And More Resistant To Scratching

Quick Details Of Polyaspartic Floor Coating:

Polyaspartic coatings distinguish themselves with their exceptional versatility and time-saving benefits. Unlike other coatings, they offer a rapid application and quick return-to-service time, minimizing downtime and maximizing productivity. With their fast curing properties, polyaspartic coatings harden within hours, allowing for same-day light use and full functionality within 24 hours. This is especially advantageous in commercial and industrial environments where minimizing disruptions is paramount. Moreover, polyaspartic coatings can be applied in a wide range of temperatures, providing flexibility that other coatings lack. Whether in extreme heat or cold, polyaspartic coatings deliver consistent performance. Their ability to adapt to various conditions and deliver fast results makes them an optimal choice for projects requiring efficiency, durability, and quality finishes.

Features Of Polyaspartic Floor Coating:

1. less slippery and more resistant to scratching
2. Withstand a lot of vehicle traffic and impact
3. Maintains clarity and appearance without yellowing
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Polyaspartic Floor Coating:

Polyaspartic flooring offers many advantages over other flooring systems. Its fast-curing properties make it possible to install and finish a floor in as little as one day, reducing downtime and improving productivity. It is highly durable and resistant to abrasion, chemicals, and UV rays, making it a long-lasting and low-maintenance flooring solution. Polyaspartic flooring can be customized with a variety of colors, patterns, and textures, providing endless design possibilities. It is also slip-resistant, improving safety in workplaces and homes. This flooring system is suitable for a variety of applications, including garages, showrooms, hospitals, schools, and even airplane hangars. With its combination of speed, durability, customization options, and low-maintenance features, polyaspartic flooring is a practical and stylish choice for both commercial and residential applications.

Product Descriptions Of Polyaspartic Floor Coating:

Item	Polyaspartic Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	600-800 cps	50-150 cps
Density, g/cm3	1.07±0.05	0.95±0.03
Mix Ratio	1:1 by weight	
Hardness	Shore, D75-80	
Pot Life	30-40mins@25°C	
Curing Time	8-12hrs@35°C, 16-24hrs@25°C 24hrs, Dry Completely	
Recoat Time	2 Hrs	
Thickness	1-3 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crekoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China