


Moisture-Proof Epoxy Flake Floor Coating Vapor Transmission For Damp Environments

Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-FL2001
- Minimum Order Quantity: 500KG
- Price: US\$3.2-4.5/Kg
- Packaging Details: Bottle/Cartron/Pallet
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T
- Supply Ability: 1000 Ton/Month

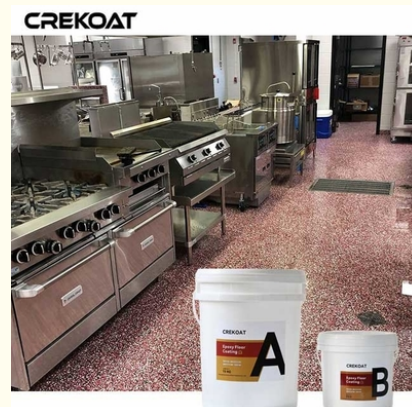

Product Specification

- Commodity Name: Epoxy Garage Flakes
- Peculiar Quality: Clear Finish
- Key Words: High Impact Strength
- Materials: 100% Solids Epoxy With Flakes
- Application: Wood, Tile, Concrete
- Mixing Ratio: 2:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **Damp Environments Epoxy Flake Floor Coating,
Moisture-Proof Epoxy Flake Floor Coating ,
Vapor Transmission Epoxy Flake Floor Coating**



Product Description

Moisture-Proof Epoxy Flake Floor Coating Vapor Transmission For Damp Environments

Quick Details Of Epoxy Flake Floor Coating:

Epoxy flake floor coatings set themselves apart with their personalized multicolored flakes, outstanding durability against stains and impacts, textured surface for improved grip, extensive color and design customization options, UV stability, and a precise multi-layer application process. This distinctive blend of features positions epoxy flake coatings as a standout selection for durable and visually captivating flooring solutions that cater to diverse environments, seamlessly fusing practicality with aesthetic allure.

Features Of Epoxy Flake Floor Coating:

1. Self-leveling capabilities for a smooth, even surface
2. Moisture vapor transmission for damp environments
3. Enhances safety with slip-resistant properties
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Epoxy Flake Floor Coating:

Epoxy flake floor coating is a highly-durable floor coating application that incorporates a double broadcast of colored flakes chips with epoxy resin and polyaspartic coatings. The system provides flooring solutions for the most demanding heavy-traffic environments, specifically in areas that require significant traction. The durable and stunning appearance that comes from this epoxy finish will endure for many years to come, with minimal or no maintenance other than regular cleaning using mild cleaning products. UV stable epoxy flake coating offers seamless, safe, highly durable, and easy to clean solutions to meet the most demanding flooring challenges.

Product Descriptions Of Epoxy Flake Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	700-900 mPa·s	300-500 mPa·s
Density, g/cm ³	1.07±0.05	0.95±0.03
Mix Ratio	2:1 by weight	
Hardness	Shore, D80-85	
Pot Life	30-40mins@25°C	
Curing Time	6-8hrs@35°C, 10-15hrs@25°C 24hrs, Dry Completely	
Recoat Time	2Hrs	
Thickness	1-3 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crecoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China