

3D Flake Floor Coating Epoxy Embedded Metallic Flakes For Shimmering Effect


Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-FL2001
- Minimum Order Quantity: 500KG
- Price: US\$3.2-4.5/Kg
- Packaging Details: Bottle/Cartron/Pallet
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T
- Supply Ability: 1000 Ton/Month


CREKOAT

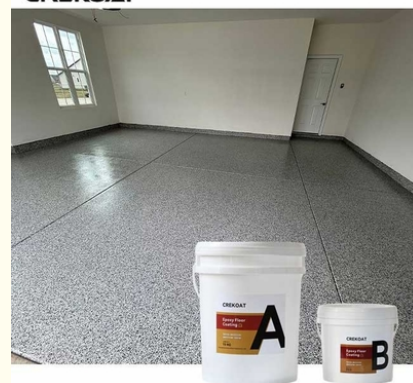

Product Specification

- Labeling: Epoxy Flake Coverage
- Tailored Feature: Fast Curing Time
- Key Words: High Impact Strength
- Materials: 100% Solids Epoxy With Flakes
- Application: Wood, Tile, Concrete
- Mixing Ratio: 2:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **3D Flake Floor Coating,
Shimmering Effect Epoxy Flake Floor Coating,
Metallic Flakes Epoxy Flake Floor Coating**

CREKOAT

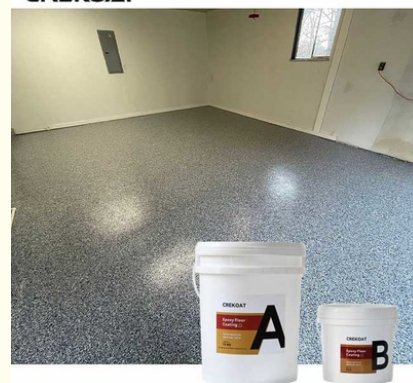

Product Description

3D Flake Floor Epoxy Embedded Metallic Flakes For A Shimmering Effect

Quick Details Of Epoxy Flake Floor Coating:

Epoxy flake floor coatings distinguish themselves through their individualized multicolored flakes, exceptional durability against stains and impacts, textured surface for enhanced grip, extensive options for color and design customization, UV stability, and a detailed multi-layer application process. This distinctive blend of features places epoxy flake coatings at the forefront as a premium choice for long-lasting, visually appealing, and versatile flooring solutions that can be tailored to suit a wide range of design preferences and environmental requirements.

Features Of Epoxy Flake Floor Coating:

1. Can be customized with 3D effects for a visually striking result
2. Embedded metallic flakes for a shimmering effect
3. Enhances safety with slip-resistant properties
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Epoxy Flake Floor Coating:

Epoxy flake floor coating is a highly-durable floor coating application that incorporates a double broadcast of colored flakes chips with epoxy resin and polyaspartic coatings. The system provides flooring solutions for the most demanding heavy-traffic environments, specifically in areas that require significant traction. The durable and stunning appearance that comes from this epoxy finish will endure for many years to come, with minimal or no maintenance other than regular cleaning using mild cleaning products. UV stable epoxy flake coating offers seamless, safe, highly durable, and easy to clean solutions to meet the most demanding flooring challenges.

Product Descriptions Of Epoxy Flake Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	700-900 mPa·s	300-500 mPa·s
Density, g/cm ³	1.07±0.05	0.95±0.03
Mix Ratio	2:1 by weight	
Hardness	Shore, D80-85	
Pot Life	30-40mins@25°C	
Curing Time	6-8hrs@35°C, 10-15hrs@25°C 24hrs, Dry Completely	
Recoat Time	2Hrs	
Thickness	1-3 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crecoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China