


Anti-Corrosive Properties Blue Flake Epoxy Floor For Industrial

Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-FL2001
- Minimum Order Quantity: 500KG
- Price: US\$3.2-4.5/Kg
- Packaging Details: Bottle/Cartron/Pallet
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T
- Supply Ability: 1000 Ton/Month

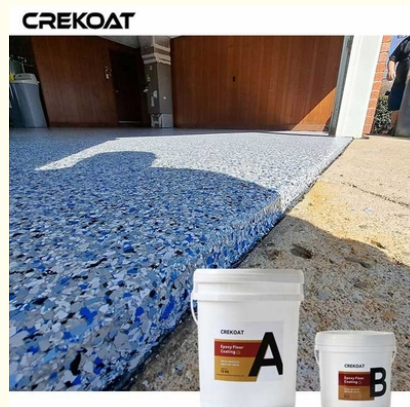

Product Specification

- Appellation: Full Broadcast Flake Floor
- Exclusive Trait: Rapid Low-Temperature Curing
- Key Words: High Impact Strength
- Materials: 100% Solids Epoxy With Flakes
- Application: Wood, Tile, Concrete
- Mixing Ratio: 2:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **Industrial Epoxy Flake Floor,
Anti-Corrosive Properties Epoxy Flake Floor,
Blue Flake Epoxy Flake Floor**



Product Description

Anti-Corrosive Properties Blue Flake Epoxy Floor For Industrial Applications

Quick Details Of Epoxy Flake Floor Coating:

Epoxy flake floor coatings shine with their distinctive multicolored flakes, unmatched durability against stains and impacts, textured surfaces for exceptional grip, a diverse range of options for color and design customization, UV resistance, and a meticulous application process involving multiple layers. This exceptional amalgamation positions epoxy flake coatings as a premier choice for long-lasting, visually captivating, and versatile flooring solutions that accommodate a wide spectrum of design preferences and environmental requirements, setting a benchmark for excellence in both endurance and aesthetic sophistication.

Features Of Epoxy Flake Floor Coating:

1. Anti-corrosive properties for industrial applications
2. Specialty additives for increased slip resistance
3. Enhances safety with slip-resistant properties
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Epoxy Flake Floor Coating:

Epoxy flake floor coating is a highly-durable floor coating application that incorporates a double broadcast of colored flakes chips with epoxy resin and polyaspartic coatings. The system provides flooring solutions for the most demanding heavy-traffic environments, specifically in areas that require significant traction. The durable and stunning appearance that comes from this epoxy finish will endure for many years to come, with minimal or no maintenance other than regular cleaning using mild cleaning products. UV stable epoxy flake coating offers seamless, safe, highly durable, and easy to clean solutions to meet the most demanding flooring challenges.

Product Descriptions Of Epoxy Flake Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	700-900 mPa.s	300-500 mPa.s
Density, g/cm3	1.07±0.05	0.95±0.03
Mix Ratio	2:1 by weight	
Hardness	Shore, D80-85	
Pot Life	30-40mins@25°C	
Curing Time	6-8hrs@35°C, 10-15hrs@25°C 24hrs, Dry Completely	
Recoat Time	2Hrs	
Thickness	1-3 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crecoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China