

Long-Lasting Finish Polyaspartic Floor Coating Applied In Various Temperatures


Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-PLS1001
- Minimum Order Quantity: 500KG
- Price: US\$8.5-12.5/Kg
- Packaging Details: Bottle/Cartron/Pallet
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T
- Supply Ability: 1000 Ton/Month


CREKOAT

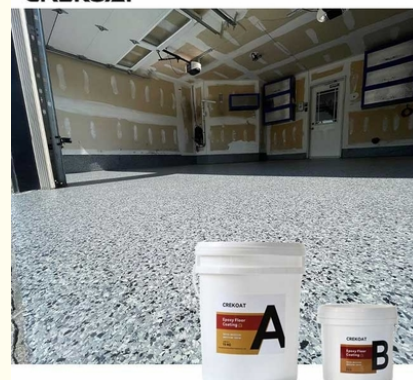

Product Specification

- Item Nomenclature: Polyaspartic Floor Covering
- Unique Highlight: High Tensile Strength
- Key Words: Interior And Exterior Use
- Materials: 90% Solid Polyaspartic
- Application: Wood, Ceramic Tile, Concrete
- Mixing Ratio: 1:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **Various Temperatures Polyaspartic Floor Coating**
, Solid Polyaspartic Floor Coating,
Long-Lasting Finish Polyaspartic Floor Coating

CREKOAT

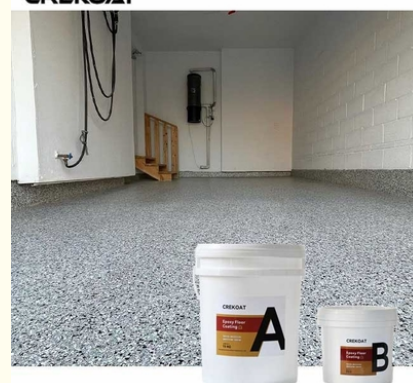

Product Description

Long-Lasting Finish Polyaspartic Floor Coating Can Be Applied In Various Temperatures

Quick Details Of Polyaspartic Floor Coating:

Polyaspartic coatings offer a unique blend of adaptability, making them equally adept at safeguarding indoor environments like bustling commercial spaces and outdoor settings such as sun-soaked pool decks. Their exceptional durability, quick curing times, and resilience against UV exposure set them apart as a versatile solution for a spectrum of applications. Whether revitalizing a retail floor for high foot traffic or protecting a driveway from the elements, polyaspartic coatings excel in providing a long-lasting finish that meets the demands of diverse environments.

Features Of Polyaspartic Floor Coating:

1. Wide range of color options
2. Can be applied in various temperatures
3. Excellent abrasion resistance
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Polyaspartic Floor Coating:

Polyaspartic flooring offers many advantages over other flooring systems. Its fast-curing properties make it possible to install and finish a floor in as little as one day, reducing downtime and improving productivity. It is highly durable and resistant to abrasion, chemicals, and UV rays, making it a long-lasting and low-maintenance flooring solution. Polyaspartic flooring can be customized with a variety of colors, patterns, and textures, providing endless design possibilities. It is also slip-resistant, improving safety in workplaces and homes. This flooring system is suitable for a variety of applications, including garages, showrooms, hospitals, schools, and even airplane hangars. With its combination of speed, durability, customization options, and low-maintenance features, polyaspartic flooring is a practical and stylish choice for both commercial and residential applications.

Product Descriptions Of Polyaspartic Floor Coating:

Item	Polyaspartic Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	600-800 cps	50-150 cps
Density, g/cm3	1.07±0.05	0.95±0.03
Mix Ratio	1:1 by weight	
Hardness	Shore, D75-80	
Pot Life	40-50mins@25°C	
Curing Time	6-8hrs@35°C, 10-15hrs@25°C 24hrs, Dry Completely	
Recoat Time	2 Hrs	
Thickness	1-3 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crekoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China