

Single Coat Polyaspartic Epoxy Floor Enhance Durability Color Vibrancy And Resistance


Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-PLS1001
- Minimum Order Quantity: 500KG
- Price: US\$8.5-12.5/Kg
- Packaging Details: Bottle/Cartron/Pallet
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T
- Supply Ability: 1000 Ton/Month


CREKOAT

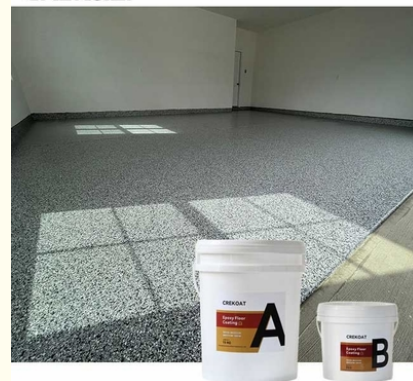

Product Specification

- Commodity Signature: Polyaspartic Products
- Signature Trait: High Tensile Strength
- Key Words: Interior And Exterior Use
- Materials: 90% Solid Polyaspartic
- Application: Wood, Ceramic Tile, Concrete
- Mixing Ratio: 1:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **Color Vibrancy Polyaspartic Epoxy Floor, Single Coat Polyaspartic Epoxy Floor**

CREKOAT

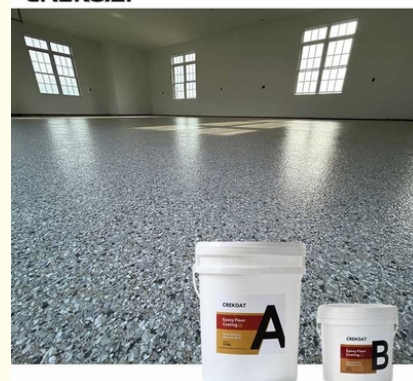

Product Description

Single Coat Polyaspartic Epoxy Floor Enhance Durability Color Vibrancy And Resistance

Quick Details Of Polyaspartic Floor Coating:

Polyaspartic coatings set themselves apart by often requiring only a single coat for adequate coverage, courtesy of their rapid curing capabilities. However, the need for multiple coats hinges on factors like product formulation, substrate condition, and desired protective or aesthetic goals. While a single application may suffice in many instances, additional coats can enhance durability, color vibrancy, and resistance, particularly in high-traffic areas. Adhering to manufacturer guidelines ensures optimal performance, tailoring the coating application to suit the specific requirements of each project for maximum effectiveness.

Features Of Polyaspartic Floor Coating:

1. Improved chemical resistance against harsh substances like gasoline or oils
2. Anti-microbial additives for hygiene-sensitive environments
3. Superior gloss retention over time for a lasting aesthetic appeal
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Polyaspartic Floor Coating:

Polyaspartic flooring offers many advantages over other flooring systems. Its fast-curing properties make it possible to install and finish a floor in as little as one day, reducing downtime and improving productivity. It is highly durable and resistant to abrasion, chemicals, and UV rays, making it a long-lasting and low-maintenance flooring solution. Polyaspartic flooring can be customized with a variety of colors, patterns, and textures, providing endless design possibilities. It is also slip-resistant, improving safety in workplaces and homes. This flooring system is suitable for a variety of applications, including garages, showrooms, hospitals, schools, and even airplane hangars. With its combination of speed, durability, customization options, and low-maintenance features, polyaspartic flooring is a practical and stylish choice for both commercial and residential applications.

Product Descriptions Of Polyaspartic Floor Coating:

Item	Polyaspartic Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	600-800 cps	50-150 cps
Density, g/cm3	1.07±0.05	0.95±0.03
Mix Ratio	1:1 by weight	
Hardness	Shore, D75-80	
Pot Life	40-50mins@25°C	
Curing Time	6-8hrs@35°C, 10-15hrs@25°C 24hrs, Dry Completely	
Recoat Time	2 Hrs	
Thickness	1-3 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crekoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China