




Quick Cure Times Metallic Polyaspartic Floor Coating Enhanced Resistance To Yellowing

Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-PLS1001
- Minimum Order Quantity: 500KG
- Price: US\$8.5-12.5/Kg
- Packaging Details: Bottle/Cartron/Pallet
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T
- Supply Ability: 1000 Ton/Month

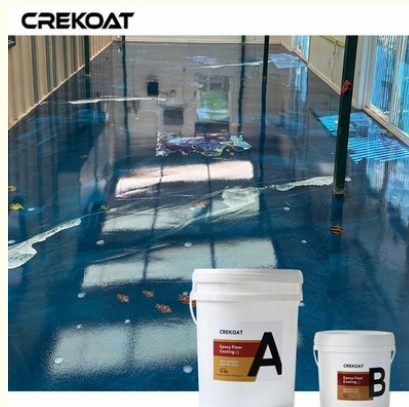

Product Specification

- Item Moniker: Polyaspartic Metallic Floor
- Specialized Element: Fast Curing
- Key Words: Interior And Exterior Use
- Materials: 90% Solid Polyaspartic
- Application: Wood, Ceramic Tile, Concrete
- Mixing Ratio: 1:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **Metallic Polyaspartic Floor Coating, Quick Cure Times Polyaspartic Floor Coating**



Product Description

Quick Cure Times Metallic Polyaspartic Floor Coating Enhanced Resistance To Yellowing

Quick Details Of Polyaspartic Floor Coating:

Polyaspartic coatings stand out for their rapid curing, often necessitating only a single coat for ample coverage. Yet, the decision for multiple coats varies based on factors such as product formulation, surface condition, and desired outcomes. While a single application suffices for many projects, additional layers can boost durability, color vibrancy, and resilience, especially in high-traffic settings. Adherence to manufacturer guidelines ensures optimal performance, customizing the coating application to meet the specific demands of each project for maximum effectiveness of the polyaspartic coating.

Features Of Polyaspartic Floor Coating:

1. Enhanced resistance to yellowing and discoloration
2. Quick cure times even at low temperatures
3. High tolerance to heavy loads and machinery
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Polyaspartic Floor Coating:

Polyaspartic flooring offers many advantages over other flooring systems. Its fast-curing properties make it possible to install and finish a floor in as little as one day, reducing downtime and improving productivity. It is highly durable and resistant to abrasion, chemicals, and UV rays, making it a long-lasting and low-maintenance flooring solution. Polyaspartic flooring can be customized with a variety of colors, patterns, and textures, providing endless design possibilities. It is also slip-resistant, improving safety in workplaces and homes. This flooring system is suitable for a variety of applications, including garages, showrooms, hospitals, schools, and even airplane hangars. With its combination of speed, durability, customization options, and low-maintenance features, polyaspartic flooring is a practical and stylish choice for both commercial and residential applications.

Product Descriptions Of Polyaspartic Floor Coating:

Item	Polyaspartic Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	600-800 cps	50-150 cps
Density, g/cm3	1.07±0.05	0.95±0.03
Mix Ratio	1:1 by weight	
Hardness	Shore, D75-80	
Pot Life	40-50mins@25°C	
Curing Time	6-8hrs@35°C, 10-15hrs@25°C 24hrs, Dry Completely	
Recoat Time	2 Hrs	
Thickness	1-3 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crecoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China