

## High-Build Non Slip Epoxy Floor Coating Provide Robust Protection


### Our Product Introduction

for more products please visit us on [epoxyresinfloorcoating.com](http://epoxyresinfloorcoating.com)

#### Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-WZ3001
- Minimum Order Quantity: 500KG
- Price: US\$2.5-3.8/Kg
- Packaging Details: Bottle/Cartron/Pallet
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T
- Supply Ability: 1000 Ton/Month

CREKOAT

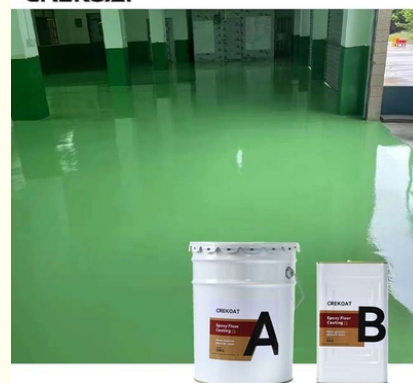

#### Product Specification

- Ware Designation: Commercial Epoxy Floor Coating
- Distinction: High Resistance To Yellowing
- Key Words: Seamless, High Gloss Finish
- Materials: Epoxy Resin And Hardener
- Application: Wood, Tile, Concrete
- Mixing Ratio: 3:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: High Gloss Epoxy Floor Coating, Epoxy Floor Coating Robust Protection

CREKOAT



## Product Description

### High-Build Non Slip Epoxy Floor Coating Provide Robust Protection

#### Quick Details Of Non Slip Epoxy Floor Coating:

Special preparations are crucial before applying industrial epoxy floor coatings. These typically include thorough surface cleaning to remove dirt, oil, grease, and other contaminants that could interfere with adhesion. Additionally, any repairs or patching of cracks, holes, or uneven areas in the substrate should be addressed to ensure a smooth and even surface for the epoxy application. Proper surface profiling, such as grinding or shot blasting, may also be necessary to promote bonding. Following manufacturer guidelines and ensuring the surface is properly prepared are essential steps to achieve a successful and long-lasting epoxy floor coating.

#### Features Of Non Slip Epoxy Floor Coating:

1. Flexible epoxies withstand substrate movement
2. High-build coatings provide robust protection
3. Waterproofing capabilities barrier finish
4. Easy to apply, easy clean and maintain
5. Withstand heavy equipment and machinery
6. Suitable for industries and commercial spaces

#### Advantages Of Non Slip Epoxy Floor Coating:

Non-slip epoxy floor coatings provide a comprehensive solution by effectively merging safety, durability, and aesthetic appeal. Designed to enhance traction and reduce the risk of slips in high-traffic areas, these coatings are particularly suited for industrial settings. Their resilience against heavy foot traffic and impacts, combined with exceptional chemical resistance, makes them an excellent choice for demanding environments. Easy to maintain and available in various colors and finishes, non-slip epoxy coatings not only prioritize safety and longevity but also elevate the visual appeal of the space, catering to diverse needs across industrial, commercial, and residential settings.

#### Product Descriptions Of Non Slip Epoxy Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Custom Colors	Transparent
Density@25°C	1.3g/cm3	
Mix Ratio	3:1 by weight	
Hardness	3H	
Pot Life	30-40mins@25°C	
Curing Time	12-15hrs@35°C, 16-24hrs@25°C 24hrs, Dry Completely	
Recoat Time	2 Hrs	
Thickness	1-3 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crekoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China