

## Black Flake Epoxy Floor Repels Stains From Oils , Grease And Other Substances


Our Product Introduction

for more products please visit us on [epoxyresinfloorcoating.com](http://epoxyresinfloorcoating.com)

### Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-TC2001
- Minimum Order Quantity: 500KG
- Price: US\$3.2-4.5/Kg
- Packaging Details: Bottle/Cartron/Pallet
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T
- Supply Ability: 1000 Ton/Month

CREKOAT

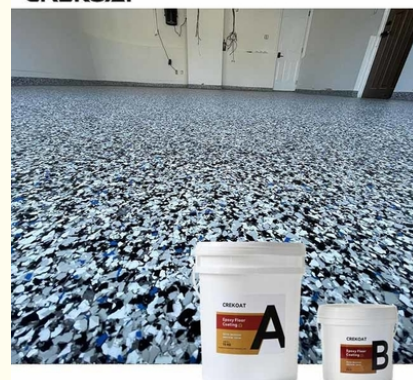

### Product Specification

- Product Caption: Acrylic Flakes Flooring
- Functions: Impact Resistant
- Key Words: Fast Curing
- Materials: 100% Solids Epoxy
- Application: Wood, Tile, Concrete
- Mixing Ratio: 2:1 By Weight
- Pot Life: 30 Minutes
- Shelf Life: 12 Months
- Highlight: **Black Flake Epoxy,**  
**Black Flake Epoxy Stain Resistant**

CREKOAT



## Product Description

### Black Flake Epoxy Floor Repels Stains From Oils, Grease, And Other Substances

#### Quick Details Of Epoxy Flake Floor Coating:

The installation of epoxy flake floor coatings typically takes 3 to 7 days, depending on the size of the area, the condition of the floor, and environmental factors. The process includes 1-2 days for cleaning, repairing, and grinding the surface, 1 day for applying the base coat and broadcasting the flakes, 1 day for the top coat application, and 1-3 days for curing. Professional installation can improve efficiency, while DIY projects may take longer. Proper temperature, humidity, and ventilation are essential for optimal curing results.

#### Features Of Epoxy Flake Floor Coating:

1. Can be modified for enhanced safety in wet areas
2. Repels stains from oils, grease, and other substances
3. Enhances safety with slip-resistant properties
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

#### Advantages Of Epoxy Flake Floor Coating:

Epoxy flake floor coating is a highly-durable floor coating application that incorporates a double broadcast of colored flakes chips with epoxy resin and polyaspartic coatings. The system provides flooring solutions for the most demanding heavy-traffic environments, specifically in areas that require significant traction. The durable and stunning appearance that comes from this epoxy finish will endure for many years to come, with minimal or no maintenance other than regular cleaning using mild cleaning products. UV stable epoxy flake coating offers seamless, safe, highly durable, and easy to clean solutions to meet the most demanding flooring challenges.

#### Product Descriptions Of Epoxy Flake Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	700-900 mPa·s	300-500 mPa·s
Density, g/cm <sup>3</sup>	1.07±0.05	0.95±0.03
Mix Ratio	2:1 by weight	
Hardness	Shore, D80-85	
Pot Life	30-40mins@25°C	
Curing Time	6-8hrs@35°C, 10-15hrs@25°C 24hrs, Dry Completely	
Recoat Time	2Hrs	
Thickness	1-5 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crekoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China