

Self Leveling Epoxy Floor Coating Can Be Textured Or Coated With Anti-Slip Additives


Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-SL5001
- Minimum Order Quantity: 500KG
- Price: US\$2.5-3.8/Kg
- Packaging Details: Bottle/Cartron/Pallet
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T
- Supply Ability: 1000 Ton/Month


CREKOAT

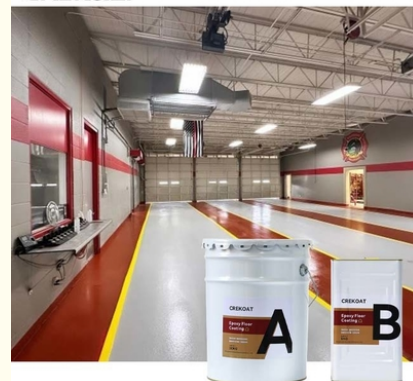

Product Specification

- Product Collection: Epoxy Top Coat
- Trait: Eco-Friendly Formulas
- Key Words: Durable Surface
- Materials: Epoxy Resin And Hardener
- Application: Wood, Tile, Concrete
- Mixing Ratio: 5:1 By Weight
- Pot Life: 30 Minutes
- Shelf Life: 12 Months
- Highlight: Wood Surfaces Epoxy Floor Coating,
Textured Finish Epoxy Floor Coating

CREKOAT

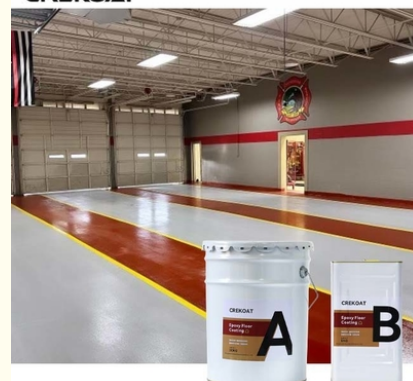

Product Description

Self Leveling Epoxy Can Be Textured Or Coated With Anti-Slip Additives

Quick Details Of Industrial Epoxy Floor Coating:

Industrial epoxy floor coatings are highly customizable, multi-layer systems engineered for extreme durability in demanding settings. Unlike standard options, these coatings can be formulated with specialized additives—such as conductive particles for static control, antimicrobial agents for sterile environments, or heavy-duty quartz aggregates for superior slip resistance. They excel in extreme conditions, withstanding thermal shock, prolonged chemical exposure, and heavy mechanical loads. Advanced formulations include self-leveling for ultra-smooth finishes or textured options for high-traction areas. Some industrial epoxies feature rapid cure technology (1-2 hours) to minimize downtime, while others offer high-temperature resistance up to 300°F (150°C). Their seamless application eliminates joints where contaminants could gather, making them ideal for food processing plants, pharmaceutical facilities, and automotive plants. Additionally, hybrid epoxy-polyurethane systems provide enhanced UV stability for semi-outdoor areas.

Features Of Industrial Epoxy Floor Coating:

1. Protects against wear and tear from machinery and equipment
2. Can be textured or coated with anti-slip additives
3. Non-slip surface for enhanced safety
4. Easy to apply, clean and maintain surface
5. Withstand heavy equipment and machinery
6. Suitable for industries and commercial spaces

Advantages Of Industrial Epoxy Floor Coating:

Industrial epoxy floor coatings offer exceptional durability, chemical resistance, and long-term cost savings, making them ideal for high-traffic facilities. Their seamless, non-porous surface resists oils, acids, and abrasions while ensuring easy cleaning and maintenance. With high adhesion strength and customizable finishes (anti-slip, UV-resistant, or decorative), they enhance safety and aesthetics. Epoxy floors also feature fast curing times, minimizing downtime, and can withstand heavy loads, making them perfect for factories, warehouses, and garages. Low-VOC options provide eco-friendly solutions without compromising performance.

Product Descriptions Of Industrial Epoxy Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Custom Colors	Transparent
Density@25°C	1.3g/cm3	
Mix Ratio	5:1 by weight	
Hardness	3H	
Pot Life	30-40mins@25°C	
Curing Time	8-10hrs@35°C, 15-20hrs@25°C 24hrs, Dry Completely	
Recoat Time	2Hrs	
Thickness	1-5mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crecoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China