

## Industrial Epoxy Floor Coating Withstand Forklift Traffic Heavy Equipment


Our Product Introduction

for more products please visit us on [epoxyresinfloorcoating.com](http://epoxyresinfloorcoating.com)

### Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-SL5001
- Minimum Order Quantity: 500KG
- Price: US\$2.5-3.8/Kg
- Packaging Details: Bottle/Cartron/Pallet
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T
- Supply Ability: 1000 Ton/Month


CREKOAT

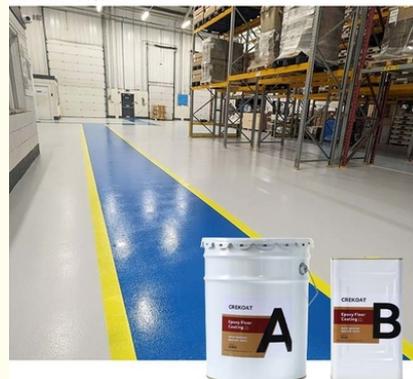

### Product Specification

- Product Edition: Non Slip Epoxy
- Traits: Decorative Designs
- Key Words: Durable Surface
- Materials: High Solids Epoxy
- Application: Wood, Tile, Concrete
- Mixing Ratio: 5:1 By Weight
- Pot Life: 30 Minutes
- Shelf Life: 12 Months

CREKOAT

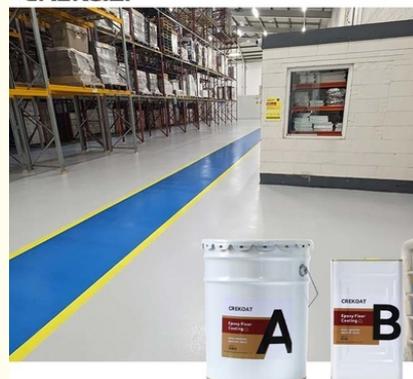

## Product Description

### Industrial Epoxy Floor Coating Withstand Forklift Traffic Heavy Equipment

#### Quick Details Of Industrial Epoxy Floor Coating:

These durable floors withstand forklift traffic, heavy equipment, and chemical spills while maintaining a neat appearance. The seamless surface prevents dirt buildup, making it ideal for areas requiring frequent cleaning like food processing plants and warehouses. Available in slip-resistant textures (for wet areas) or glossy finishes (to enhance brightness), they can be ready for use within 24-48 hours after installation. With just routine water rinsing for maintenance, these floors deliver reliable performance for 5-8 years, making them a smart, economical choice for industrial flooring needs.

#### Features Of Industrial Epoxy Floor Coating:

1. Antimicrobial additives for sterile environments
2. Moisture-tolerant applications
3. Non-slip surface for enhanced safety
4. Easy to apply, clean and maintain surface
5. Withstand heavy equipment and machinery
6. Suitable for industries and commercial spaces

#### Advantages Of Industrial Epoxy Floor Coating:

Industrial epoxy floor coatings offer exceptional durability, chemical resistance, and long-term cost savings, making them ideal for high-traffic facilities. Their seamless, non-porous surface resists oils, acids, and abrasions while ensuring easy cleaning and maintenance. With high adhesion strength and customizable finishes (anti-slip, UV-resistant, or decorative), they enhance safety and aesthetics. Epoxy floors also feature fast curing times, minimizing downtime, and can withstand heavy loads, making them perfect for factories, warehouses, and garages. Low-VOC options provide eco-friendly solutions without compromising performance.

#### Product Descriptions Of Industrial Epoxy Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Custom Colors	Transparent
Density@25°C	1.3g/cm3	
Mix Ratio	5:1 by weight	
Hardness	3H	
Pot Life	30-40mins@25°C	
Curing Time	8-10hrs@35°C, 15-20hrs@25°C 24hrs, Dry Completely	
Recoat Time	2Hrs	
Thickness	1-5mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	



 +8615017402317  [info@crekoat.com](mailto:info@crekoat.com)  [epoxyresinfloorcoating.com](http://epoxyresinfloorcoating.com)

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China