



Fast Installation Polyaspartic Coating Non-Yellowing High-Gloss Finish

Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com

Basic Information

- Place of Origin: DONGGUAN, CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-PLS1001
- Minimum Order Quantity: 500KG
- Price: US\$8.5-12.5/Kg
- Packaging Details: Bottle/Cartron/Wooden Box
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 1000000 Ton/Year


CREKOAT



Product Specification

- Brand Signature Mark: Polyaspartic Metallic Floor
- Signature Trait: Versatile Applications
- Key Words: Interior And Exterior Use
- Materials: 90% Solid Polyaspartic
- Application: Wood, Ceramic Tile, Concrete
- Mixing Ratio: 1:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **Fast Installation Polyaspartic Coating,
Non Yellowing Polyaspartic Coating,
High Gloss Polyaspartic Coating**

CREKOAT

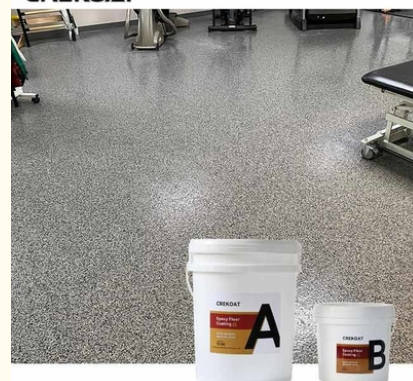

Product Description

Fast Installation Polyaspartic Coating Non-Yellowing High-Gloss Finish

Quick Details Of Polyaspartic Floor Coating:

Polyaspartic coatings surpass traditional epoxy coatings by providing exceptional resistance to thermal shock, making them ideal for environments with extreme temperature fluctuations. They offer better clarity and color retention, which is especially beneficial for decorative flooring systems that require a pristine appearance. Additionally, polyaspartic coatings can be applied in higher humidity conditions without compromising their performance, unlike many epoxy coatings that can be sensitive to moisture during application. Their non-yellowing, high-gloss finish ensures long-term visual appeal and durability, making polyaspartic coatings an excellent choice for both functional and aesthetic flooring solutions.

Features Of Polyaspartic Floor Coating:

1. Installed quickly, speeding up project timelines
2. Can be applied in low temperatures
3. Ensuring durability under heavy loads
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

Advantages Of Polyaspartic Floor Coating:

Polyaspartic flooring offers many advantages over other flooring systems. Its fast-curing properties make it possible to install and finish a floor in as little as one day, reducing downtime and improving productivity. It is highly durable and resistant to abrasion, chemicals, and UV rays, making it a long-lasting and low-maintenance flooring solution. Polyaspartic flooring can be customized with a variety of colors, patterns, and textures, providing endless design possibilities. It is also slip-resistant, improving safety in workplaces and homes. This flooring system is suitable for a variety of applications, including garages, showrooms, hospitals, schools, and even airplane hangars. With its combination of speed, durability, customization options, and low-maintenance features, polyaspartic flooring is a practical and stylish choice for both commercial and residential applications.

Product Descriptions Of Polyaspartic Floor Coating:

Item	Polyaspartic Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	600-800 cps	50-150 cps
Density, g/cm3	1.07±0.05	0.95±0.03
Mix Ratio	1:1 by weight	
Hardness	Shore, D75-80	
Pot Life	30-40mins@25°C	
Curing Time	8-12hrs@35°C, 16-24hrs@25°C 24hrs, Dry Completely	
Recoat Time	2 Hrs	
Thickness	1-3 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crekoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China