

## Low Viscosity Polyaspartic Floor Coating For Showroom Retail Space Sports Facility


Our Product Introduction

for more products please visit us on [epoxyresinfloorcoating.com](http://epoxyresinfloorcoating.com)

### Basic Information

- Place of Origin: DONGGUAN, CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-PLS1001
- Minimum Order Quantity: 500KG
- Price: US\$8.5-12.5/Kg
- Packaging Details: Bottle/Carton/Wooden Box
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 1000000 Ton/Year

**CREKOAT**

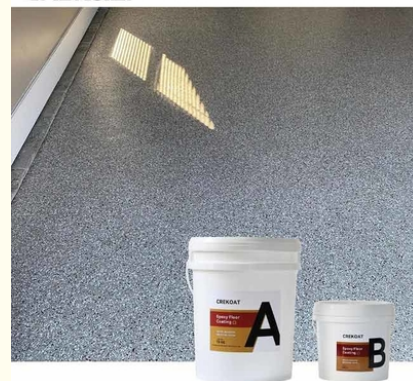

### Product Specification

- Brand Label: Polyurea Polyaspartic Coating
- Standout Characteristic: Easy Application
- Key Words: Interior And Exterior Use
- Materials: 90% Solid Polyaspartic
- Application: Wood, Ceramic Tile, Concrete
- Mixing Ratio: 1:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: Sports Facility Polyaspartic Floor Coating, Retail Space Polyaspartic Floor Coating, Low Viscosity Polyaspartic Floor Coating

**CREKOAT**



## Product Description

### Low Viscosity Polyaspartic Floor Coating For Showroom Retail Space Sports Facility

#### Quick Details Of Polyaspartic Floor Coating:

Polyaspartic coatings stand out for their remarkable versatility. Unlike other coatings, they adhere well to various substrates, including concrete, steel, and existing coatings. This flexibility simplifies application and extends the lifespan of the coating system. Additionally, polyaspartic coatings offer excellent resistance to chemicals, such as solvents, acids, and alkalis. This makes them highly suitable for industrial environments where spills and chemical exposure are common. Moreover, their customizable options, including a range of colors and finishes, allow for aesthetically pleasing spaces. Whether it's a showroom, retail space, or sports facility, polyaspartic coatings enhance both appearance and durability. Overall, the versatility, chemical resistance, and customization options make polyaspartic coatings an optimal choice for a wide range of projects.

#### Features Of Polyaspartic Floor Coating:

1. Flows easily for smooth application, even in tight spaces
2. Meets regulations for volatile organic compound emissions
3. Maintains clarity and appearance without yellowing
4. Easy to apply, clean and maintain
5. Naturally de-foaming with no ripples
6. Durable, high gloss, water resistant

#### Advantages Of Polyaspartic Floor Coating:

Polyaspartic flooring offers many advantages over other flooring systems. Its fast-curing properties make it possible to install and finish a floor in as little as one day, reducing downtime and improving productivity. It is highly durable and resistant to abrasion, chemicals, and UV rays, making it a long-lasting and low-maintenance flooring solution. Polyaspartic flooring can be customized with a variety of colors, patterns, and textures, providing endless design possibilities. It is also slip-resistant, improving safety in workplaces and homes. This flooring system is suitable for a variety of applications, including garages, showrooms, hospitals, schools, and even airplane hangars. With its combination of speed, durability, customization options, and low-maintenance features, polyaspartic flooring is a practical and stylish choice for both commercial and residential applications.

#### Product Descriptions Of Polyaspartic Floor Coating:

Item	Polyaspartic Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Transparent	Transparent
Viscosity@25°C	600-800 cps	50-150 cps
Density, g/cm3	1.07±0.05	0.95±0.03
Mix Ratio	1:1 by weight	
Hardness	Shore, D75-80	
Pot Life	30-40mins@25°C	
Curing Time	8-12hrs@35°C, 16-24hrs@25°C 24hrs, Dry Completely	
Recoat Time	2 Hrs	
Thickness	1-3 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crecoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China