

Solvent-Free Non Slip Epoxy Floor Coating Reduce Environmental Impact


Our Product Introduction

for more products please visit us on epoxyresinfloorcoating.com

Basic Information

- Place of Origin: CHINA
- Brand Name: CREKOAT
- Certification: TDS, MSDS
- Model Number: CK-WZ3001
- Minimum Order Quantity: 500KG
- Price: US\$2.5-3.8/Kg
- Packaging Details: Bottle/Cartron/Pallet
- Delivery Time: 3-7 Working Days
- Payment Terms: T/T
- Supply Ability: 1000 Ton/Month


CREKOAT

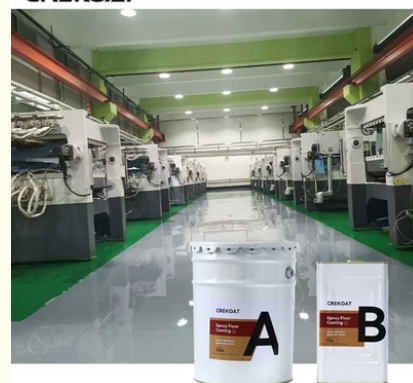

Product Specification

- Brand Designation: Non Slip Epoxy Floor Coating
- Characterizing Factor: Low Odor Formulation
- Key Words: Seamless, High Gloss Finish
- Materials: Epoxy Resin And Hardener
- Application: Wood, Tile, Concrete
- Mixing Ratio: 3:1 By Weight
- Pot Life: 40 Minutes
- Shelf Life: 12 Months
- Highlight: **Non Slip Epoxy Floor Coating,
Reduce Environmental Impact Epoxy Floor
Coating
, Solvent-Free Epoxy Floor Coating**

CREKOAT

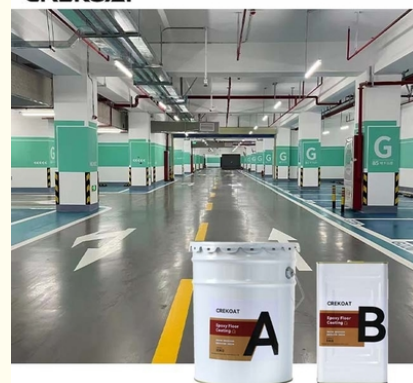

Product Description

Solvent-Free Non Slip Epoxy Floor Coating Reduce Environmental Impact

Quick Details Of Non Slip Epoxy Floor Coating:

In the process of preparing for the application of Non-Slip Epoxy Floor Coating, meticulous surface priming is vital. Thoroughly cleansing the surface to eliminate dirt, oils, grease, and contaminants is paramount. Moreover, addressing any cracks, holes, or irregularities in the substrate is crucial to ensure a level surface for the epoxy application. Employing specialized surface profiling techniques like diamond grinding or shot blasting can further enhance adhesion and optimize the anti-slip characteristics of the coating. Adhering closely to manufacturer guidelines and confirming that the surface is flawlessly clean, structurally sound, and properly primed are essential steps in achieving a resilient and secure non-slip epoxy flooring system.

Features Of Non Slip Epoxy Floor Coating:

1. Solvent-free epoxy coatings reduce environmental impact
2. High-gloss epoxy finishes offer a luxurious, shiny appearance
3. Waterproofing capabilities barrier finish
4. Easy to apply, easy clean and maintain
5. Withstand heavy equipment and machinery
6. Suitable for industries and commercial spaces

Advantages Of Non Slip Epoxy Floor Coating:

Non-slip epoxy floor coatings provide a comprehensive solution by effectively merging safety, durability, and aesthetic appeal. Designed to enhance traction and reduce the risk of slips in high-traffic areas, these coatings are particularly suited for industrial settings. Their resilience against heavy foot traffic and impacts, combined with exceptional chemical resistance, makes them an excellent choice for demanding environments. Easy to maintain and available in various colors and finishes, non-slip epoxy coatings not only prioritize safety and longevity but also elevate the visual appeal of the space, catering to diverse needs across industrial, commercial, and residential settings.

Product Descriptions Of Non Slip Epoxy Floor Coating:

Item	Epoxy Resin(A)	Hardener(B)
Appearance	Liquid	Liquid
Color	Custom Colors	Transparent
Density@25°C	1.3g/cm3	
Mix Ratio	3:1 by weight	
Hardness	3H	
Pot Life	30-40mins@25°C	
Curing Time	12-15hrs@35°C, 16-24hrs@25°C 24hrs, Dry Completely	
Recoat Time	2 Hrs	
Thickness	1-3 mm	
Shelf Life	12 Months	
Application	Industrial Use - Garages, Warehouses, Airports and hangars. Commercial Use - Shopping malls and boutiques, Hotels, Offices, Showrooms, Restaurants, Hospitals, Schools, Bar Tops, Table Tops. Residential Use - Entrances and hallways, basements, entertainment rooms, bathrooms, kitchens and living rooms.	





+8615017402317



info@crecoat.com



epoxyresinfloorcoating.com

No.38, Fengguo Industrial Avenue, Sanshui District, Foshan City, China